

APM Buildings Quotation Package



QUOTATION FOR:
Ag Building Ag6010416

CONTACT: 1-888-261-2488 CONSTRUCTION: DIMENSIONS:

Post Frame 60' X 104' X 16'

SPECIFICATIONS FOR 60' X 104' X 16' POST FRAME PACKAGE:

• MATERIAL PACKAGE

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 7.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 7.25 APM Stock Columns 3 Ply Gable Posts (10' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 12 Double Top Girt Truss Carrier
- Beige Tuff Rib 3 Panel Steel Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

• DOORS & WINDOWS


- One 3' 6 Panel Entry Door
- Two 16' X 16' 2" Double Sliders
- One Stock Windows 3' x 3' 8" Single Hung Window

• 12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT

• FASTENERS

- 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

• DETAILED BUILDING PLANS

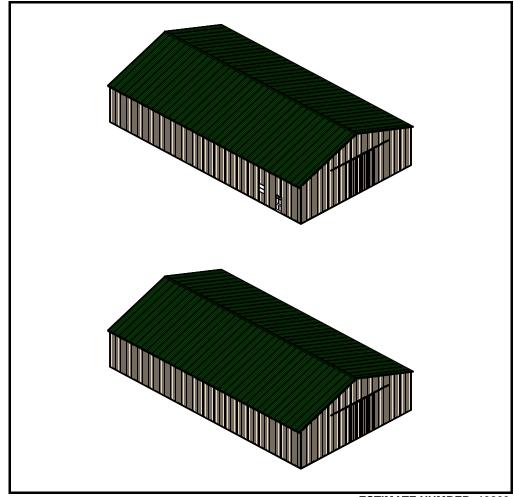

 Subtotal
 \$36,917.67

 Discount
 (\$5,906.00)

 Total
 \$31,011.67

ESTIMATE NUMBER: 19860



POLE LAYOUT

Personal Use, 6240 sq. ft.



Maestro

