



APM Buildings Quotation Package



QUOTATION FOR:
Wood Wood242410

CONTACT:
1-888-261-2488

CONSTRUCTION: Post Frame
DIMENSIONS: 24' X 24' X 10'

SPECIFICATIONS FOR 24' X 24' X 10' POST FRAME PACKAGE:

● **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 10 Double Top Girt Truss Carrier
- 7/8" Rough 1 side Pine Boards
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

● **DOORS & WINDOWS**


- Two 9 X 8 Clopay T52S Ins. Std. Trk. w/o Openers
- One 3' 6 Panel Entry Door
- One Stock Windows 3' x 3' 8" Single Hung Window

● **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

● **FASTENERS**

- 8D Galv. Nails for Plywood Siding
- 1 In.Metal to Wood Screws for Steel Roof Panel
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

● **DETAILED BUILDING PLANS**

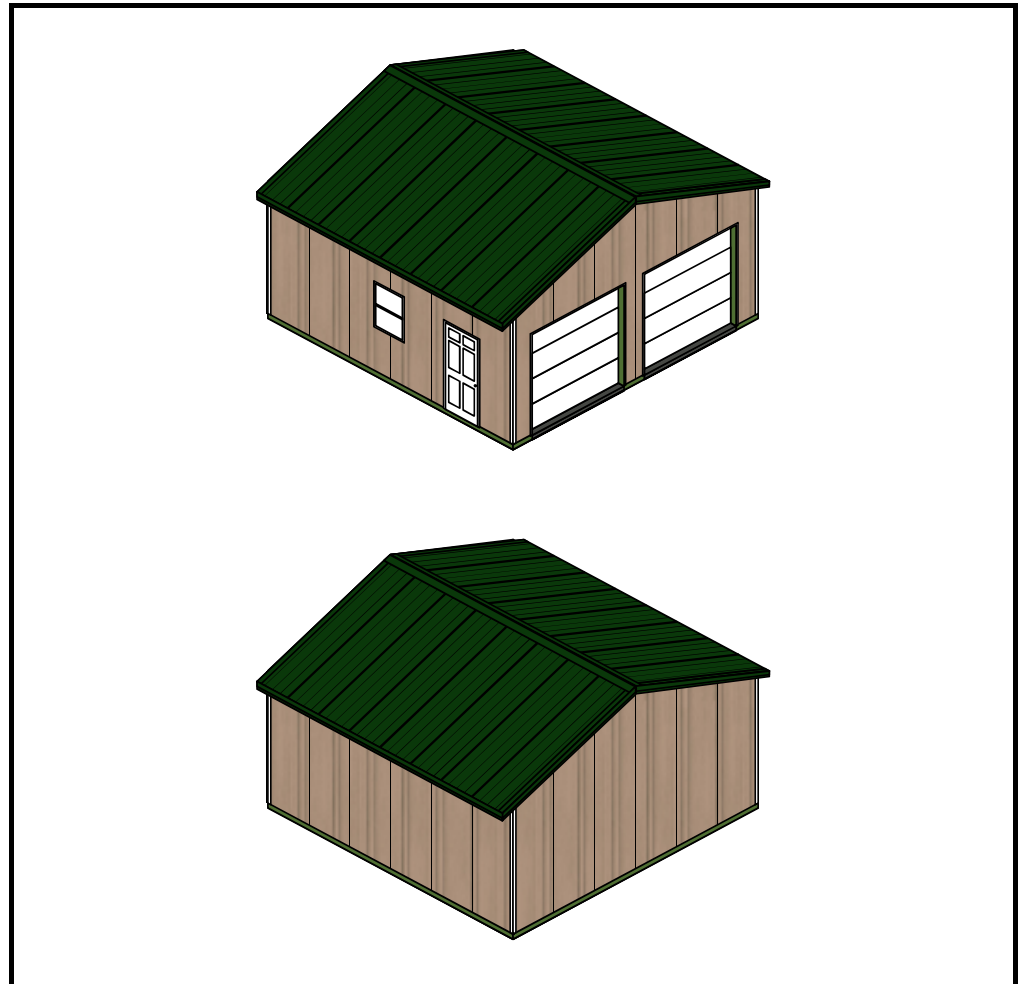

Subtotal	\$7,047.37
Discount	(\$352.00)
Total	\$6,695.37

ESTIMATE NUMBER: 19868



POLE LAYOUT

Personal Use, 576 sq. ft.



Eave 1

